


# 35T SWING THRU' LIFTING CAPACITIES

STABILIZING LEGS MUST BE AT MAXIMUM REACH & EXTENSION FOR THESE LIFT CAPACITIES TO BE ACHIEVED.  
(REFER OPERATION MANUAL)

REDUCING STABILIZING LEG REACH OR EXTENSION WILL RESULT IN A REDUCED LIFT CAPACITY.

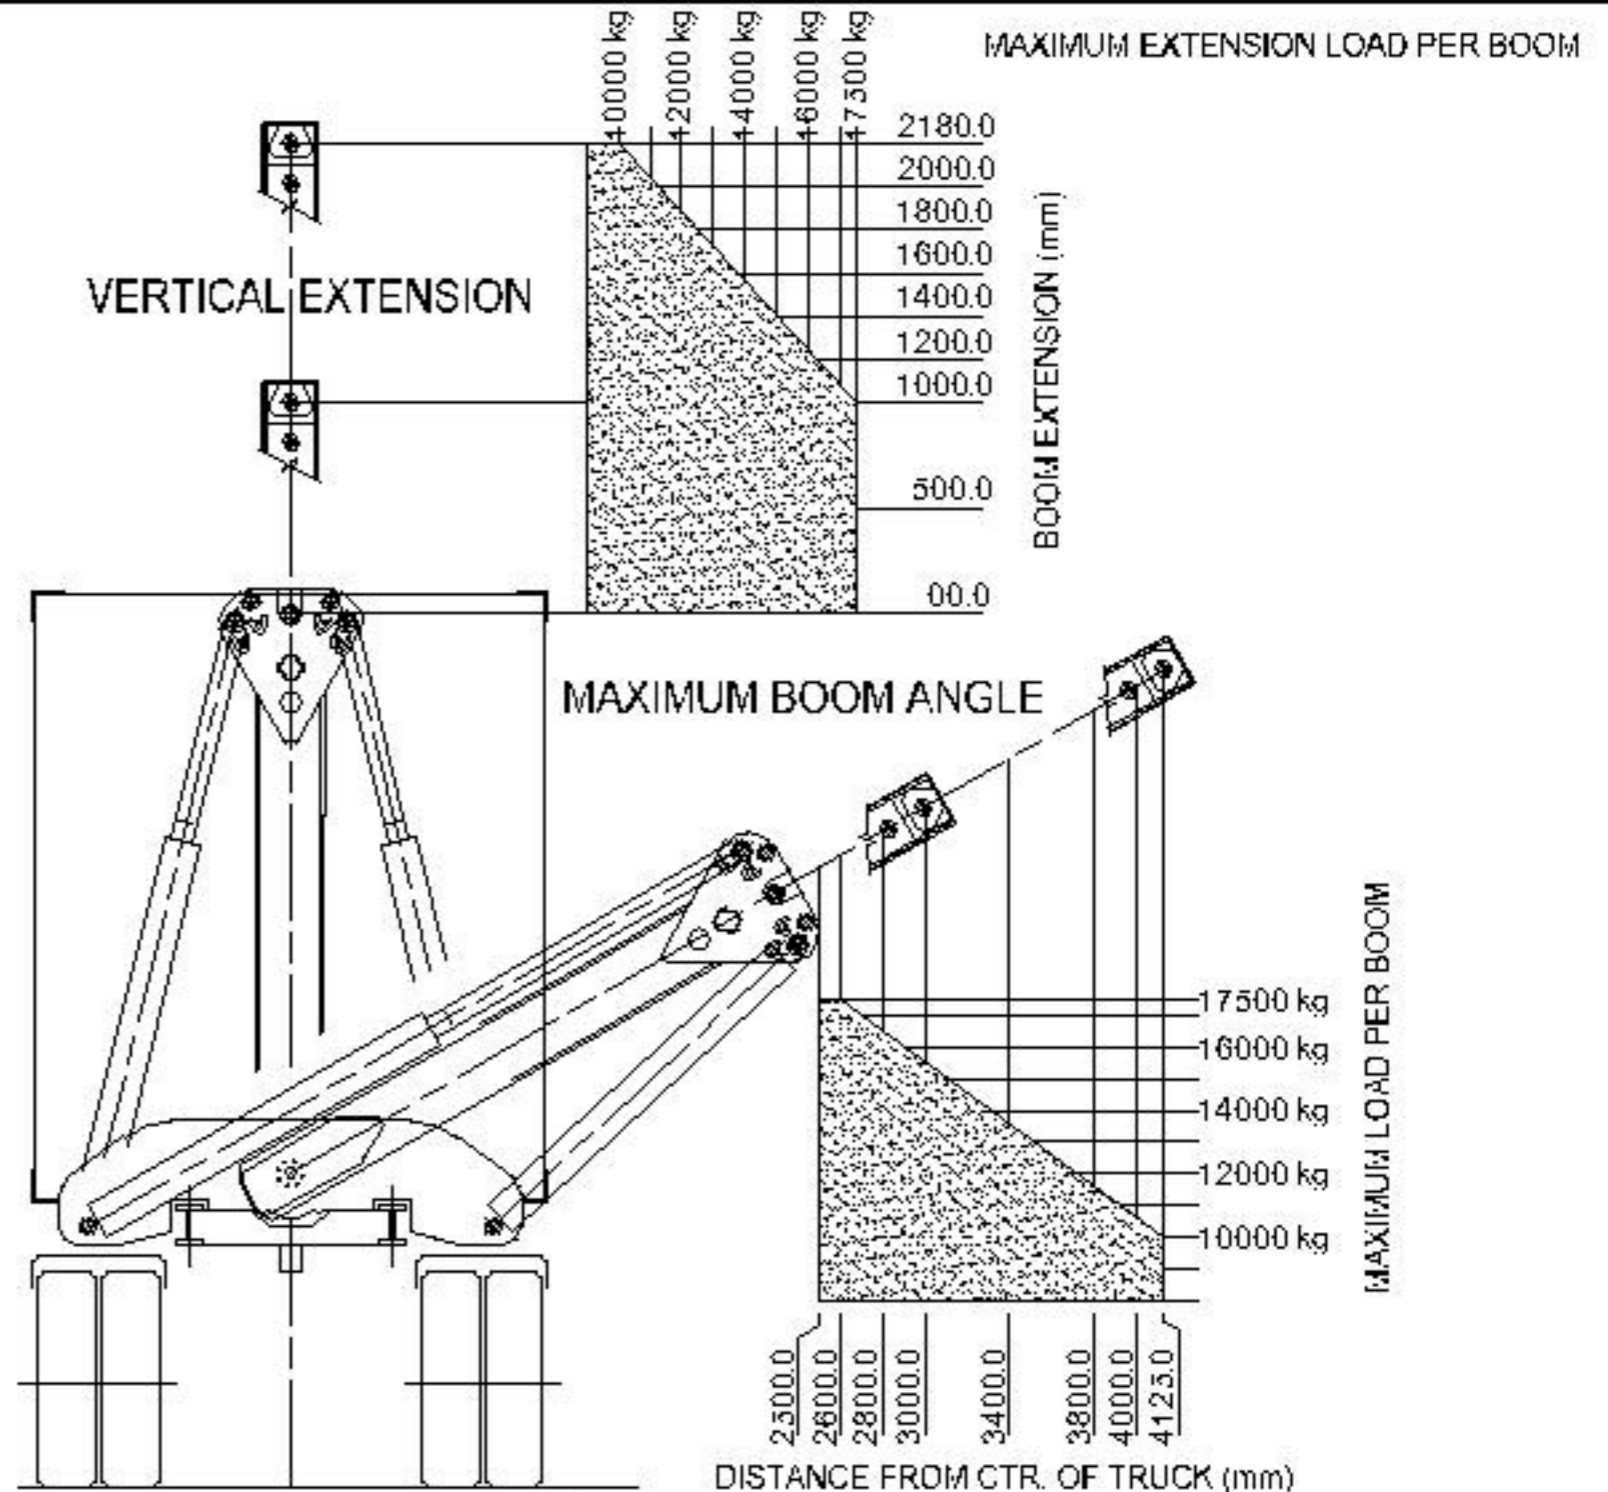

REV.	DESCRIPTION	DATE
B	LIFT CENTRES TO 2500mm	06-08-01
A	PRELIMINARY	

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE METRIC  
WITH INCHES BRACKETED ( )

UNSPECIFIED TOLERANCES  
 LINEAR X = ±1.0 [±0.40]  
 XX = ±0.5 [±0.20]  
 XXX = ±0.25 [±0.10]  
 XXXX = ±0.100 [±.004]  
 ANGULAR X = ±0.5  
 XX = ±0.1

**SWING THRU' INTERNATIONAL LIMITED**  
P. O. BOX 1148, DUNEDIN 8015, NEW ZEALAND. PHONE 0034 03 4543789

**STKC-35T - SWING THRU'**  
**LIFT / REACH ENVELOPE**

SHEET SIZE  
**A4**

SCALE  
**NTS**

ALL DIMENSIONS IN MILLIMETRES

**SWING THRU' INTERNATIONAL LIMITED**  
P. O. BOX 1148, DUNEDIN 8015, NEW ZEALAND. PHONE 0034 03 4543789

**STKC-35T - SWING THRU'**  
**LIFT / REACH ENVELOPE**

SHEET SIZE  
**A4**

**STLAB004**

REV **B**